


## OKS 3725

### Gear Oil for Food Processing Technology

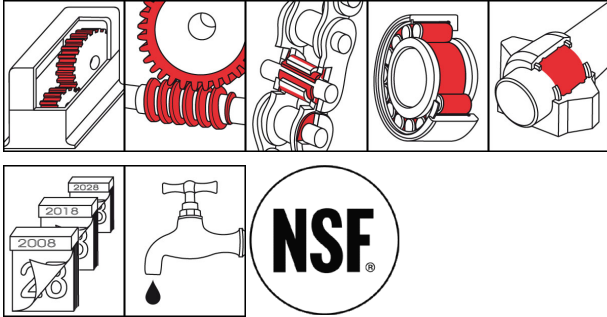

#### Description

Fully synthetic oil of the ISO VG class 320 for lubricating gears and other machine elements in the food processing technology.

#### Applications

- Lubrication of closed toothed gearing
- Liquid lubrication of chains, joints, guides, rolling and friction bearings
- Suitable for immersion-bath, immersion-bath circulation and injection lubrication

#### Branches

- Plant and machine (tool) engineering
- Chemical industry
- Rubber and plastic processing
- Paper and packaging industry
- Rail vehicle technology
- Municipal services
- Shipbuilding and marine technology
- Catering equipment and food processing technology
- Iron and steel industry
- Glass and foundry industry
- Logistics

#### Advantages and benefits

- NSF H1 registered
- Good ageing and oxidation stability through optimal additives
- Cold and hot water resistant
- Resistant to water steam, disinfectants and cleaning agents
- Wide operating temperature range
- Shear-stable and low-foaming
- Good wear protection
- Good corrosion protection
- Long economic operating times
- MOSH-/MOAH-free

#### Application tips

Clean the lubricating point thoroughly for optimal effect. Before filling gears for first time, remove anti-corrosion agent. Fill the gears so that the immersing teeth transport the lubricant reliably. Apply a sufficient amount of lubricant with a brush, drip oiler, by immersion or using a suitable automatic lubrication system. Observe the gear and machine manufacturer's instructions. Assess the lubrication frequency and quantity on basis of service conditions. Only mix with suitable lubricants.

#### Packaging

- 5 l Canister
- 25 l Canister



# OKS 3725

## Gear Oil for Food Processing Technology

### Technical Data

|   | Standard               | Conditions          | Unit               | Value                   |
|---|------------------------|---------------------|--------------------|-------------------------|
| <b>Main components</b>                    |                        |                     |                    |                         |
| base oil                                  |                        |                     |                    | synthetic oil mixture   |
| <b>Application related technical data</b> |                        |                     |                    |                         |
| marking                                   | DIN 51 502             | DIN 51 825          |                    | CLP HC 320              |
| viscosity at (40°C)                       | DIN 51 562-1           |                     | mm <sup>2</sup> /s | 320                     |
| viscosity at (100°C)                      | DIN 51 562-1           |                     | mm <sup>2</sup> /s | 35                      |
| viscosity index                           | DIN ISO 2909           |                     |                    | approx. 150             |
| viscosity class                           | DIN 51 519             | DIN 51 562-1, 40°C  | ISO VG class       | 320                     |
| pour point                                | DIN ISO 3016           | 3°C step            | °C                 | < -30                   |
| flashing point                            | DIN ISO 2592           | > 79, open crucible | °C                 | > 200                   |
| lower operating temperature               |                        |                     | °C                 | -30                     |
| upper operating temperature               |                        |                     | °C                 | 120                     |
| colour                                    |                        |                     |                    | colourless-yellow       |
| density (at 15°C)                         | analogue to DIN 51 757 |                     | g/cm <sup>3</sup>  | 0.85                    |
| SKF-EMCOR Copper                          | DIN EN ISO 2160        | 24h, 100°C          | corr. degree       | 1-100                   |
| FZG wear protection test                  | DIN ISO 14 635-01      | A/8,3/90            | power level        | > 12                    |
| <b>Properties and approvals</b>           |                        |                     |                    |                         |
| approval for food processing technology   |                        |                     |                    | NSF H1, Reg.-Nr. 143596 |

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47  
 82216 Maisach  
 Phone: +49 (0) 8142 3051 - 500  
 info@oks-germany.com  
 www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark  
**Safety data sheet** for industrial and commercial users is available for downloading under [www.oks-germany.com](http://www.oks-germany.com). Our Customer and Technical service will be pleased to help should you have any further questions.