



## OKS 476

### Multipurpose Grease for Food Processing Technology

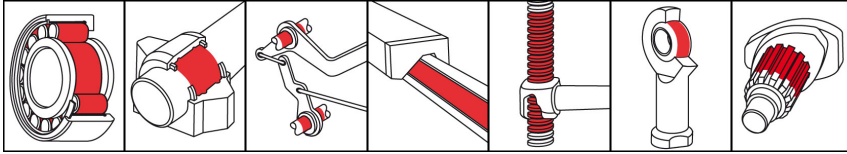

#### Description

Universal multipurpose grease for food processing technology for lubricating rolling and friction bearings and other machine elements.

#### Applications

- Grease lubrication of rolling and friction bearings, joints, linear drives and chains
- Lubrication of fittings, seals, moulded parts and elements of elastic rubber materials in the hot- and cold-water segment
- Lubrication of fittings or machines in dairies, breweries, bakeries, slaughterhouses, etc.

#### Advantages and benefits

- NSF H1 registered
- Reduces wear
- Excellent resistance to oxidation and ageing
- Resistant to hot and cold water, water vapour, watery-alkaline and acidic disinfectants and cleaning agents

#### Branches

- Glass and foundry industry
- Logistics
- Rubber and plastic processing
- Iron and steel industry
- Rail vehicle technology
- Municipal services
- Catering equipment and food processing technology
- Chemical industry
- Shipbuilding and marine technology
- Plant and machine (tool) engineering
- Paper and packaging industry



## PRODUCT INFORMATION

### OKS 476

### Multipurpose Grease for Food Processing Technology

#### Application tips

Clean the lubricating points well for optimal effect. Before filling for first time, remove anti-corrosion agent. Fill the bearing such that all functional surfaces are certain of being greased. Fill normal bearings up to about 1/3 of the free space inside the bearing. Low-speed bearings (DN value < 50,000) and their housings should be filled completely. The bearing and machine manufacturer's instructions should be observed. Subsequent lubrication at the lubrication nipples by grease gun or by automatic lubrication system. Assess the lubrication frequency and quantity on basis of service conditions. If old grease cannot be removed, restrict the quantity of grease so as to avoid overlubricating the bearing. If lubrication frequencies tend to be low, you should aim for a full grease change. Only mix with suitable lubricants.

#### Packaging

- 400 ml Cartridge
- 1 kg Can
- 5 kg Hobbock
- 25 kg Hobbock
- 180 kg Drum

#### Technical Data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				semi-synthetic oil
thickener				aluminium-complex soap
<b>Application related technical data</b>				
marking	analogue to DIN 51 502			KP2K-30
viscosity at (40°C)	DIN 51 562-1	base oil	mm <sup>2</sup> /s	240
viscosity at (100°C)	DIN 51 562-1	base oil	mm <sup>2</sup> /s	22
drop point	DIN ISO 2176		°C	> 220
consistency	DIN 51 818	DIN ISO 2137	NLGI grade	2
worked penetration	DIN ISO 2137	60DH	0.1 mm	265-295
lower operating temperature	DIN 51 805	≤ 1400hPa	°C	-30
upper operating temperature			°C	110
colour				white
density (at 20°C)	DIN 51 757		g/cm <sup>3</sup>	0.92
water resistance	DIN 51 807-1	3h/90°C	Degree 0-3	1
DN value (dm x n)			mm/min	400,000
four-ball test rig welding load	DIN 51 350-4		N	2,200
<b>Properties and approvals</b>				
approval for food processing technology				NSF H1, Reg.-Nr. 137619

#### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47  
 82216 Maisach  
 Phone: +49 (0) 8142 3051 - 500  
 info@oks-germany.com  
 www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark  
**Safety data sheet** for industrial and commercial users is available for downloading under [www.oks-germany.com](http://www.oks-germany.com). Our Customer and Technical service will be pleased to help should you have any further questions.